




THURLBY THANDAR INSTRUMENTS

TG210

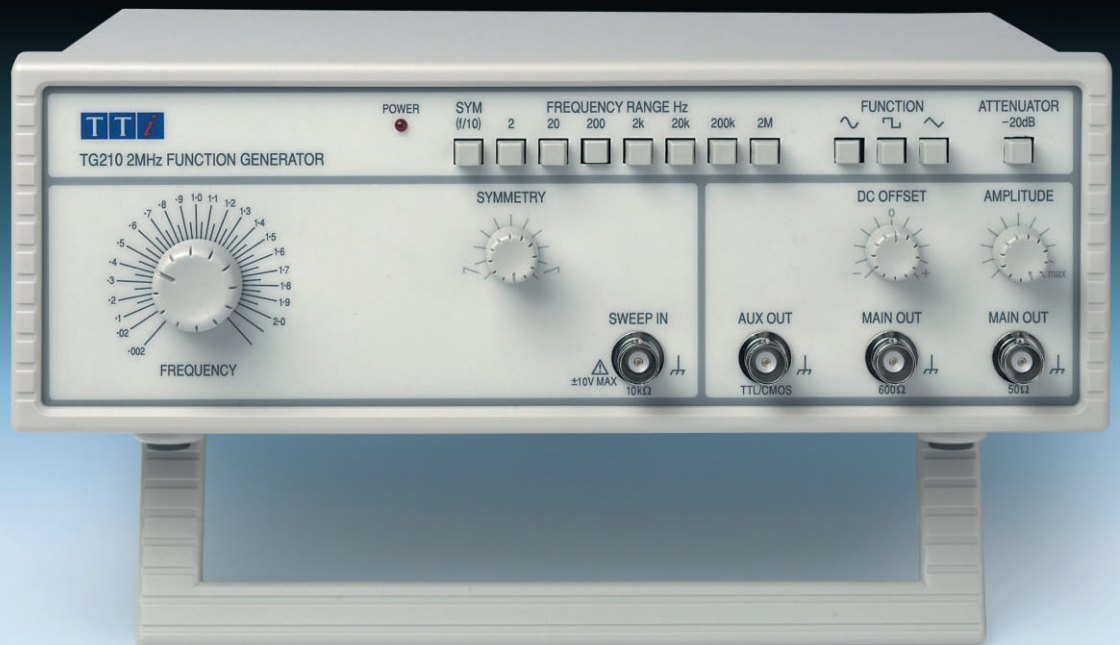

2MHz function generator

- ▶ *0.02Hz to 2MHz frequency range*
- ▶ *Very high waveform quality at all frequencies & levels*
- ▶ *20mV to 20V pk-pk from 50 Ω or 600 Ω*
- ▶ *Auxiliary TTL/CMOS output*
- ▶ *Variable symmetry with constant frequency*
- ▶ *Variable DC offset with zero detent*
- ▶ *1000:1 frequency change by vernier or sweep voltage*

TG210 - 2MHz function generator

A basic generator of high performance

The TG210 is a basic 2MHz function generator which offers very high waveform quality at all frequencies and levels. Frequency is set using a calibrated vernier knob.

The feature set includes variable symmetry and variable dc offset with centre detent.

Output impedances of 50Ω and 600Ω are supported via separate output sockets.

Main Features

- ▶ 0.02Hz to 2MHz frequency range
- ▶ High waveform quality at all frequencies & levels
- ▶ 20mV to 20V pk-pk from 50 Ω or 600 Ω
- ▶ Auxiliary TTL/CMOS output
- ▶ Variable symmetry with constant frequency
- ▶ Variable DC offset with zero detent
- ▶ 1000:1 frequency change by vernier or sweep voltage

Part of an extensive range

TTi offers a wide choice of function generators both analogue and digital, from this basic 2MHz model up to a highly sophisticated 40MHz unit.

Users requiring an analogue function generator with digital readout and a wider feature set should request information on the TG300 series of 3MHz generators.

Technical Specifications

FREQUENCY

Frequency Range:	0.02Hz to 2MHz in 7 overlapping decade ranges with fine adjustment by a vernier.
Vernier Range:	1000:1 on each range.
Vernier Accuracy:	Typically ±5% of full scale.

OPERATING MODES

Specifications apply for the top decade of each frequency range and maximum output into 50Ω termination.

SINE

Distortion: <0.5% on 200, 2k and 20k ranges; <1% on 2, 20 and 200k ranges; all harmonics >25dB below fundamental on 2M range.

Amplitude Flatness: ±0.2dB to 200kHz; ±1dB to 2MHz.

TRIANGLE

Linearity: Better than 99% to 200kHz

SQUARE WAVE

Rise/Fall Times: <100ns

Mark - Space Ratio: 1:1 ± 1% to 100kHz

DC

Range: ±10V unterminated

SYMMETRY

Symmetry Range: Variable typically 1:9 to 9:1 (on top decade of each range), frequency divided by 10.

OUTPUTS

MAIN - 50 Ohm

Amplitude: 20mV to 20V peak-peak open circuit (10mV to 10V peak-peak into 50Ω) in two switch selectable ranges with 40dB vernier control within each range

DC Offset Range: ±10V from 50Ω. DC offset plus signal peak limited to ±10V (±5V into 50Ω). DC offset plus waveform attenuated proportionally by the attenuator.

MAIN - 600 Ohm

Alternative output socket offering the same facilities as the 50Ω socket.

AUX OUT

0 to 5V TTL/CMOS logic levels capable of driving 2 standard TTL loads. Frequency, symmetry and phase as main outputs

SWEEP (EXTERNAL)

Input Impedance:	10kΩ
Input Sensitivity:	0 to 3V for 1000:1 sweep
Max. Input Voltage:	±10V
Sweep Linearity:	Better than 1%
Max. Slew Rate:	0.1V/us

GENERAL

CASING

Moulded ABS case with tilt stand.

POWER REQUIREMENTS

Input Voltage: 220 to 240 volts AC nominal 50/60Hz or 110 to 120 volts AC nominal 50/60Hz by rear panel adjustment. Installation category II.

Power Consumption: 25VA max.

TEMPERATURE & ENVIRONMENTAL

Operating Temp Range: +5°C to +40°C, 20% to 80% RH.

Storage Temp. Range:

-10°C to +65°C

Environmental: Indoor use at altitudes up to 2000m.

Pollution degree 2.

SIZE

260(W) x 88(H) x 235(D)mm (10.2 x 3.4 x 9.2"), excluding tilt stand and feet.

WEIGHT

1.9kg (4.2lb)

SAFETY

Complies with EN61010-1.

EMC

Complies with EN61326.

Thurlby Thandar Instruments Ltd. operates a policy of continuous development and reserves the right to alter specifications without prior notice.

Designed and built in Europe by:



Thurlby Thandar Instruments Ltd.

Glebe Road, Huntingdon. Cambs. PE29 7DR United Kingdom (UK)

Tel: +44 (0)1480 412451 Fax: +44 (0)1480 450409

Email: sales@tti-test.com Web: www.tti-test.com